



Siemens Configuration Guides

Version 1.0

Yeastar Information Technology Co. Ltd.

Configuring Siemens C470IP, S685IP with MyPBX

1. Ensure that you have created the extension that you wish to use with the phone in MyPBX first. Take note of the extension number and the password that you have entered for the extension.
2. Connect the Siemens IP phone to the network and mains power supply. The phone will boot up, and providing you have DHCP installed on your network. (This is based on a phone that is set to factory defaults.)
3. To obtain the IP address assigned click on the right hand option of the joystick button, and scroll down to 'Settings' and click OK.
4. Scroll down to 'Base' and select OK. Scrolling down the menu you will find a 'Network' option. Once you OK this option all the network information will be displayed.
5. Now point your browser to the web interface of the phone: 'http ://< phone-ip-address>' where is the IP address shown on the phone.
6. Enter the system PIN of the phone and click ok to access the phone's configuration. The default PIN is '0000'.
7. The configuration will now display 3 tabs, namely Home, Settings and Status. Enter the 'Settings' node to start configuring the phone.
8. In the 'IP Configuration' node, all defaults may be retained, unless you wish to specify a fixed IP.
9. Click on the 'Telephony' node to access the phone configuration.
10. The 'Connections' node will allow the configuration of the device, which allows various IP connections / profiles.

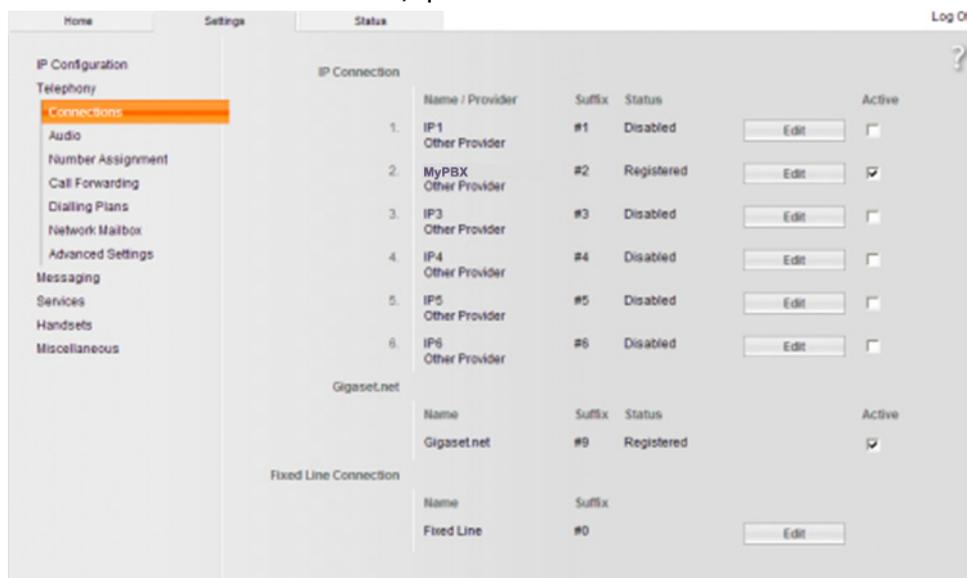


Figure 1-1

11. Click on the Edit button next to the Profile you wish to configure.
12. In the 'Connection name or number' enter 'MyPBX'.
13. The 'Authentication name', 'Authentication password', 'Username' and 'Display name' fields should be populated with the extension information on MyPBX console

Home Settings Status Log Off

IP Configuration
Telephony
Connections
Audio
Number Assignment
Call Forwarding
Dialing Plans
Network Mailbox
Advanced Settings
Messaging
Services
Handsets
Miscellaneous

2. IP Connection

You can replace the default name with a name or the actual phone number to distinguish this connection.

Connection Name or Number: MyPBX

Auto Configuration

If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.

Auto Configuration Code: []

Start Auto Configuration

Provider: Other Provider Select VoIP Provider

Personal Provider Data

Authentication Name: 500

Authentication password: []

Username: 500

Display name: 500

Show Advanced Settings

Set Cancel Delete

Figure 1-2

14. Click the 'Show Advanced Settings' option.
15. In the 'Proxy Server Address' and 'Registrar Server' enter the IP address of your MyPBX server.

General Provider Data

Domain: 192.168.5.150

Proxy server address: 192.168.5.150

Proxy server port: 5060

Registrar server: 192.168.5.150

Registrar server port: 5060

Registration refresh time: 30 sec

Network

STUN enabled: Yes No

STUN server: []

STUN port: 3478

STUN refresh time: 240 sec

NAT refresh time: 20 sec

Outbound proxy mode: Always Auto Never

Outbound proxy: []

Outbound proxy port: 5060

Figure 1-3

16. Click on 'Set' to apply the changes and start making calls.

<Finish>