

Stacking/Wall Mount Bracket Instructions

Wall Mounting

Mount your wireless devices up high for optimum signal coverage or use it to get your wired networking devices off your desk and out of the way.

- 1 Locate two flat-head screws (not included) designed for your wall's composition. Mark two spots on the wall 3-5/16 inches (8.4 cm) apart, then install the screws into the wall.
- 2 Remove the four rubber feet from the device, line up and snap the mounting plate onto the device as shown.
- 3 Line up the Bracket's mounting holes with the screws on the wall, place the device over the screws, and slide it down into place.

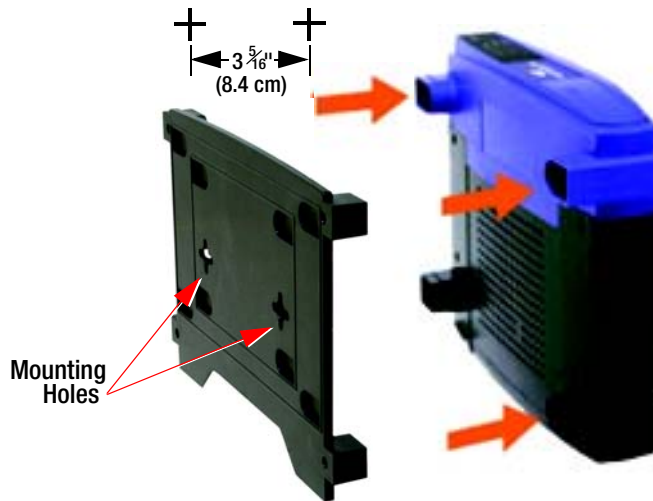


Figure 1: Wall Mounting

Stacking

The Stacking/Wall Mount Bracket can also be used to securely stack Linksys compact components on top of standard-sized ones. Its feet mate to the top of a standard-sized device, while depressions on the bracket accept the foot-spacing of the smaller devices.

Remove the four rubber feet from your device, line up and snap the Stacking/Wall Mount Bracket onto the device, as shown.

Stacking/Wall Mount Bracket



Figure 2: Stacking